

## Wooden Doors

include flush solid core MDF door, pine frame, stainless steel spring hinges, brushed nickel door handle, Porta lock<sup>1</sup> for home elevators or WR-500<sup>2</sup> for VPLs; 80" high by 36" wide (42" option for flat doors)



Flat



Flat Vision Panel



2-Panel



5-Panel

## ProDoor

fire rated 1.5 hour UL certified;  
includes Prolock, WR-500 lock or GAL  
for VPLs<sup>2</sup>; Porta lock<sup>1</sup> for residential

- Optional insulated exterior package with concealed operator WR-500 lock
- Custom sizes from 32" to 48" wide, and up to 96" high



Project number

Project name

## Aluminum Door

flush low profile with stainless steel hinges



For home elevators: tempered laminated safety glass insert, spring hinges and Porta<sup>1</sup> or SDL lock<sup>3</sup> (shown); painted white (PS111W2)




For VPLs: acrylic, tempered glass or laminated safety glass insert and WR-500 or GAL lock<sup>2</sup> for VPLs

- <sup>1</sup> Porta lock is compliant with code ASME A17.1 for home elevators
- <sup>2</sup> WR-500, Prolock and GAL locks are compliant with code ASME A18.1 for VPLs
- <sup>3</sup> SDL is compliant with code ASME A17.1 for home elevators

## Frame and Lock Kits

for use with flush solid core slab doors by others

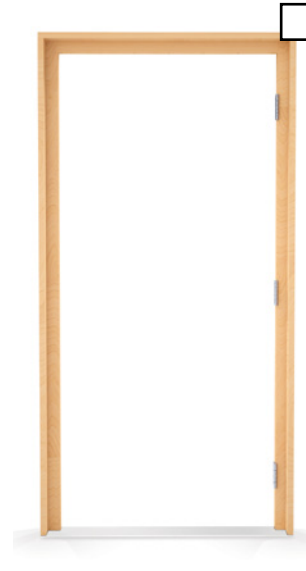

## Frame and Lock

for home elevators with 1¾" door; includes pine frame 80" wide by 36" or 42" wide; stainless steel spring hinges, Porta lock<sup>1</sup>

## Porta Lock

for home elevators<sup>1</sup>



## WR-500 Lock

weather-resistant lock for VPLs<sup>2</sup>

